
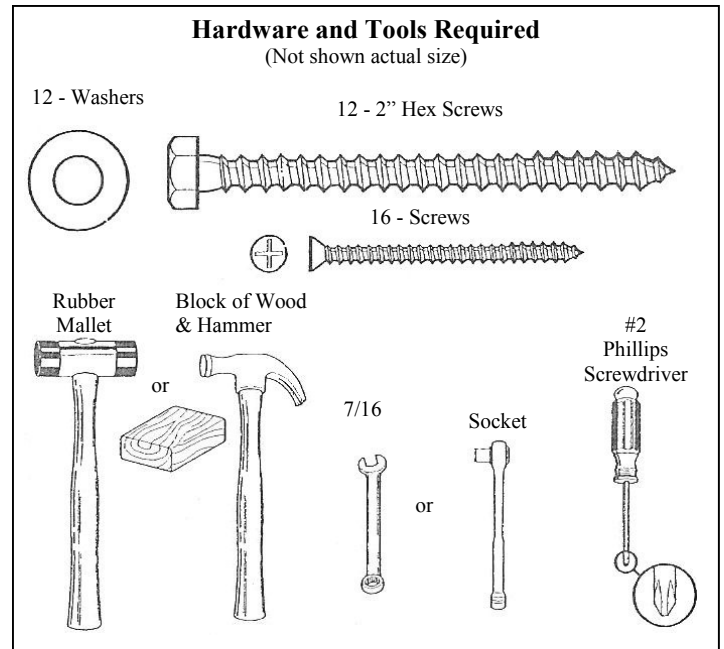


## CF2960 Bridge

Please check contents **before assembly**. If any items are missing or damaged, **do not take the unit back to the store**. Call 1-800-427-5136 for customer service, we will save you time by correcting any problems directly for you.

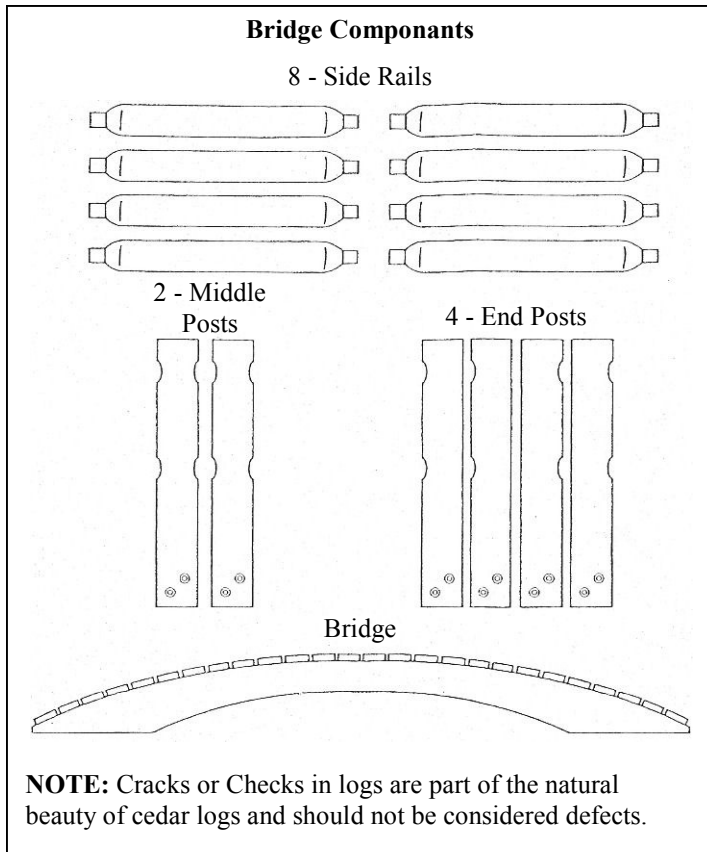

### NOTE:

- Read all instructions before starting.

### Helpful Tips:

- Do not completely tighten any screws until the unit is fully assembled and setting on a level surface.
- Use a rubber mallet (or a block of wood between the hammer and the unit) to drive doweled ends into holes as far as possible.
- If you have hardware left over after completing your unit, it most likely has been assembled incorrectly, and may not be safe to use. Please call Customer Service at 800-427-5136 for assistance.
- **Check all nuts and bolts for tightness before and during each usage season.**

**STEP 1** Insert side rails into end post and one middle post as shown in figure 1. Making sure the notches at the bottom of the posts face the same direction, as shown in figure 1. Repeat process to assemble the other bridge side rail assembly.



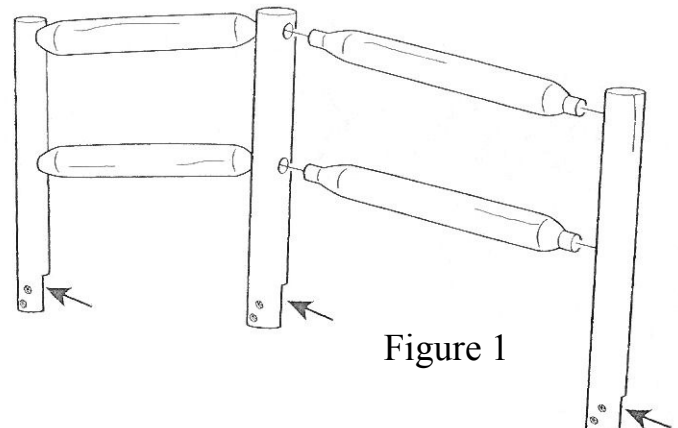



Figure 1

**STEP 2** Set the bridge on a smooth flat surface. Attach side rail assembly (with notches in post facing toward the bridge), with washers and hex head screws as shown in figure two. Repeat process with other side rail assembly.

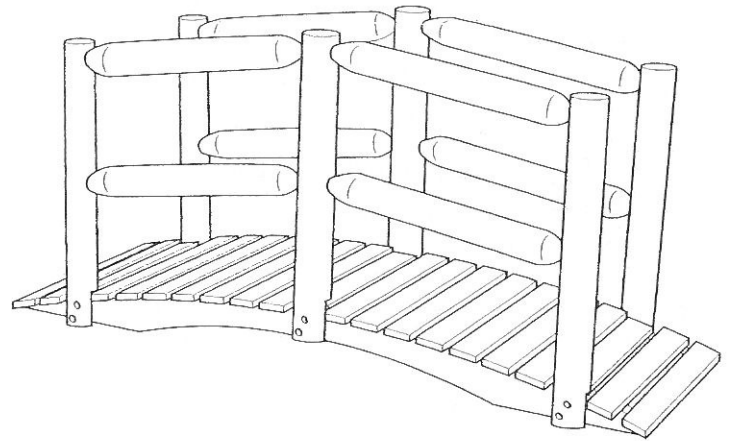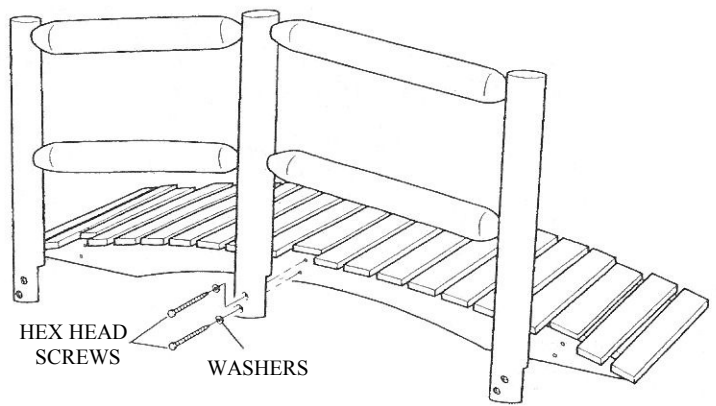

**Figure 2**

**STEP 3** Secure all dowel joints in place with screws perpendicular to the doweled end at the location indicated by the arrows in figure 3.

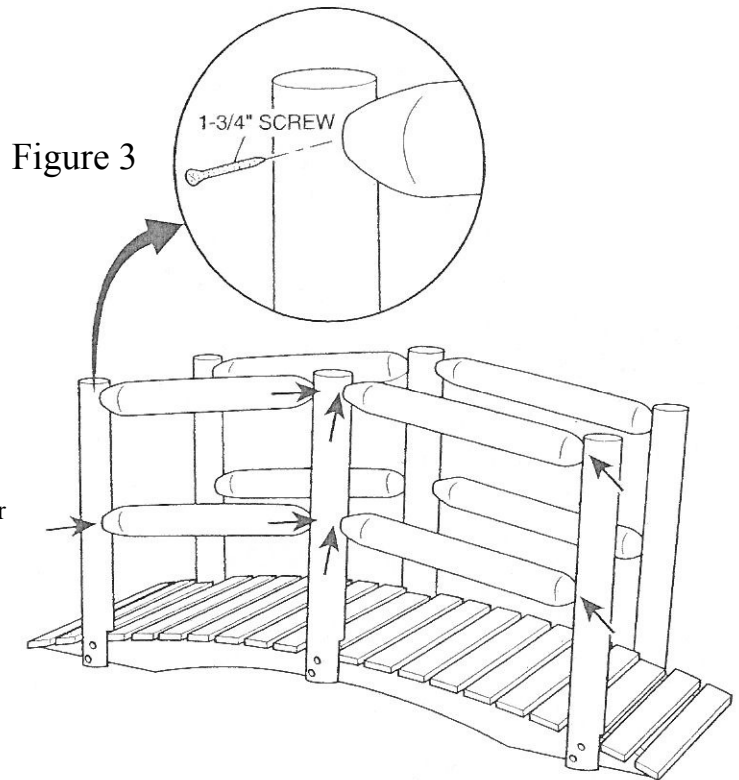

**Figure 3**

Make sure the bridge is level, tighten all screws. Your bridge is now assembled and ready for finish or immediate use.

**lakeland**  
**mills**

